

USB Sensor Interface

For strain gauge, potentiometric, DC/DC and Pt100 sensors

Model 9206

Code:	9206 EN
Delivery:	ex stock/1 week
Warranty:	24 months

NEW


Accuracy 0.01 % F.S.
with DAkkS certificate
for strain gauge input

NEW

Evaluation software
DigiVision administrates
up to 32 measuring channels
with mathematical functions



1 channel In-Line IP67

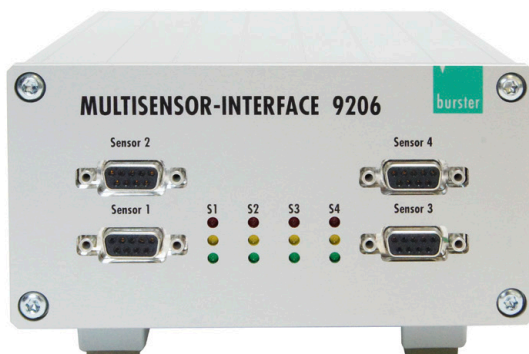

USB multi sensor interface in housing

- Inexpensive "Plug & Measure" design
- Simple connection via PC USB port
- 24 bit resolution
- High-speed measurement of up to 1200 readings/sec.
- Convenient configuration and analysis software DigiVision
- Pt100 as option
- LabVIEW and DLL drivers free of charge
- Integration in customer-owned software
- 6 wire technology for the highest precision

Application

In the field there is a frequent need to measure sensor readings rapidly and easily right at the sensor and to transfer them directly to a PC without additional amplifiers or converters. The 9206 USB sensor interface can satisfy this requirement admirably, thanks to its „plug & measure“ design. The USB connection means installation could not be simpler.

Typical applications:

- ▶ Mobile test measurements via laptop
- ▶ Laboratory test set-ups
- ▶ Instrumentation and control
- ▶ Diagnostic measurements in the chemical industry
- ▶ PC-based recording of expansion figures in bio engineering

Description

The USB sensor interface takes its supply from the connected PC via the USB port, and uses it to generate the power supply for the sensors. The initial settings and sensor settings are made by burster in-house and saved in the USB sensor interface. These can then be fine-tuned by the customer.

Software provides display and archiving functions. But a license key enables an open-end expansion. 32 interfaces output curves may be displayed at the same time. One USB sensor interface can be connected as standard. Each sensor can be tared individually, and measurement curves can be displayed jointly or separately in a graph. We can configure the interface to suit a specific sensor, although customer-specific parameters can be changed using the free analysis software supplied.

The connection to LabVIEW or the integration into customers' software is enabled by a free driver package.

Technical Data

Connectable sensors

Strain gauge

Bridge resistance:	350 Ω ... 5 kΩ
Connection system:	6 wire
Sensitivity:	0 ... 50 mV/V
Sensor excitation:	2.5 V / 5 V
Excitation current:	max. 45 mA
Measurement:	± 0.05 % F.S.

Potentiometer

Connection system:	3 wire
Resistance:	1 kΩ ... 5 kΩ
Measurement signal:	5 V
Sensor excitation:	5 V
Excitation current:	max. 45 mA
Measurement error:	± 0.05 % F.S.

Transmitter and DC/DC sensors

Sensor excitation:	12 V
Excitation current:	80 mA
Measurement signal:	± 10 V
Measurement error:	± 0.05 % F.S.

Temperature Pt100

Sensors:	Pt100
Range:	- 200 ... + 600 °C
Accuracy:	0.1 K
Measuring rate:	max. 2 meas./s

General amplifier data

Resolution:	24 bit
Measuring rate except Pt100:	only with software 9206-P100 or 9206-P200 and 1 measuring channel with 9206-P001
up to 1200 readings per second	
up to 200 readings per second	
Input resistance:	> 1 GΩ
Temperature coefficient:	20 ppm/K
Environmental temperature range:	0 ... + 60 °C
Storage temperature:	- 40 ... + 70 °C
Zero drift:	< 0.1 μV/K

In-Line housing

Material:	Aluminium
Dimensions:	115 x 25 [mm]
Weight:	200 g
Protection class:	IP67
Mounting method:	screw clamp
Power supply:	via USB-plug 4 V ... 6 V
Cable length from sensor to 9206:	max. 3 m
Cable length from PC to 9205:	2.8 m
Sensor connection:	terminal block PG 7 connection
USB connection on 9206:	PG 7 connection

Desktop housing

Material:	Aluminium
Dimensions:	210 x 150 x 90 mm
Protection class:	IP20
Power supply:	90 ... 230 VAC / 11 ... 30 VDC
Cable length from PC to 9205:	1 m
Sensor connection:	9 pole Sub min D
Isolation:	yes / rated voltage 50 V
Display:	status LED
Energy input:	max. 30 VA

Software DigiVision

System requirement:

Windows XP, Vista, Win7

Order Code

USB-Sensor-Interface 9206-V	X	0	0	X
IP67 tube housing	0			
IP40 tube housing with 12 pin connector for sensors	2			
Strain gauge, Poti, DC/DC			1	
Pt100			2	
including measurement and analysis software 9206-P001				

USB multi sensor interface - in housing

9206-V3	Sensor1	Sensor2	Sensor3	Sensor4	-	
unoccupied					0	
Strain gauge, Poti, DC/DC					1	
Pt100					2	
Option increased measurement accuracy for strain gauge input only 0.01 % F.S. incl. DAkkS certificate						- H
9206-V3xxxx including measurement and analysis software 9206-P100						

Order Information

An example for ordering a desktop case version

Desktop case version with 2 USB sensor interfaces for strain gauge sensors and 2 USB sensor interfaces for Pt100 sensors. The software DigiVision 9206-P100 is included **Model 9206-V31122**

Adjustment of a measurement chain

Model 92-ABG

Consisting of sensor and USB sensor interface

Accessories

Configuration and evaluation software DigiVision for 1 channel measurement and 200 measurements/sec. (included in scope of delivery) **Model 9206-P001**

Configuration and evaluation software DigiVision for multi-channel measurement. The software can display up to 16 USB Sensor Interfaces parallelly. Up to 1200 meas./sec. are possible, no mathematic functions or calculation **Model 9206-P100**

Configuration and evaluation software DigiVision for multi-channel (displays up to 32 measurement curves at the same time) and measurement, up to 1200 meas./sec. possible. Measurement results can be offset against each other via freely programmable mathematic measuring channels. **Model 9206-P200**

Connecting cable, 12 pin female connector

one end open for 9206-V000x

Model 99540-000A-0150002

Connecting cable, 9 pin Sub-D female connector

one end open for 9206-V000x

Model 99609-000E-0150002

DAkkS certificate for the DMS measurement range of the 9206-V03xxxx-H, for 1 measuring channel, for the option of the accuracy of 0.01 % F.S. **Model 92DKD-9206-V3H**




DigiVision Configuration and Analysis Software

General Software Data


- ▶ Convenient device finder
- ▶ Instrument parameterization
- ▶ Instrument data adopted automatically, e.g. scaling, limit settings
- ▶ Back-up function for instrument data
- ▶ Simultaneous display of up to 16 measurement channels
- ▶ Different measurement rates can be combined
- ▶ Different triggers can be set: global or channel-specific
- ▶ Creation of instrument groups
- ▶ Report finder for locating group reports and individual reports
- ▶ Documenting individual measurement curves with various options e.g. serial number, batch counter, day counter

- ▶ Export function to Excel
- ▶ Communication with a controller unit (PLC etc.) via RS232 or Ethernet

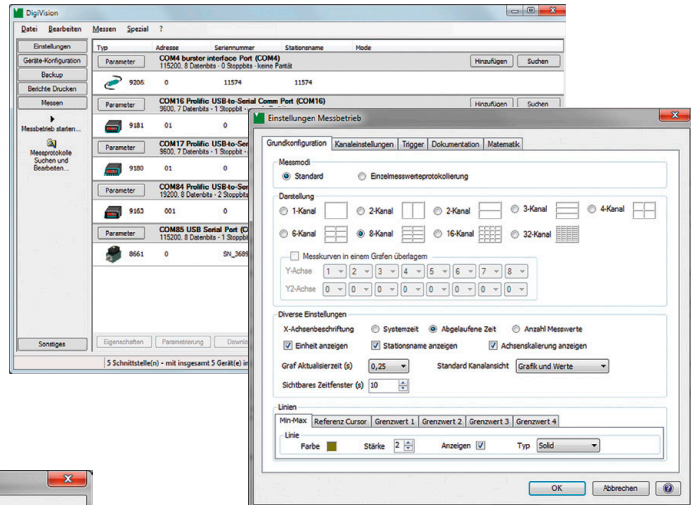


Software DigiVision P001

- ▶ 1 interface with up to 200 meas/s

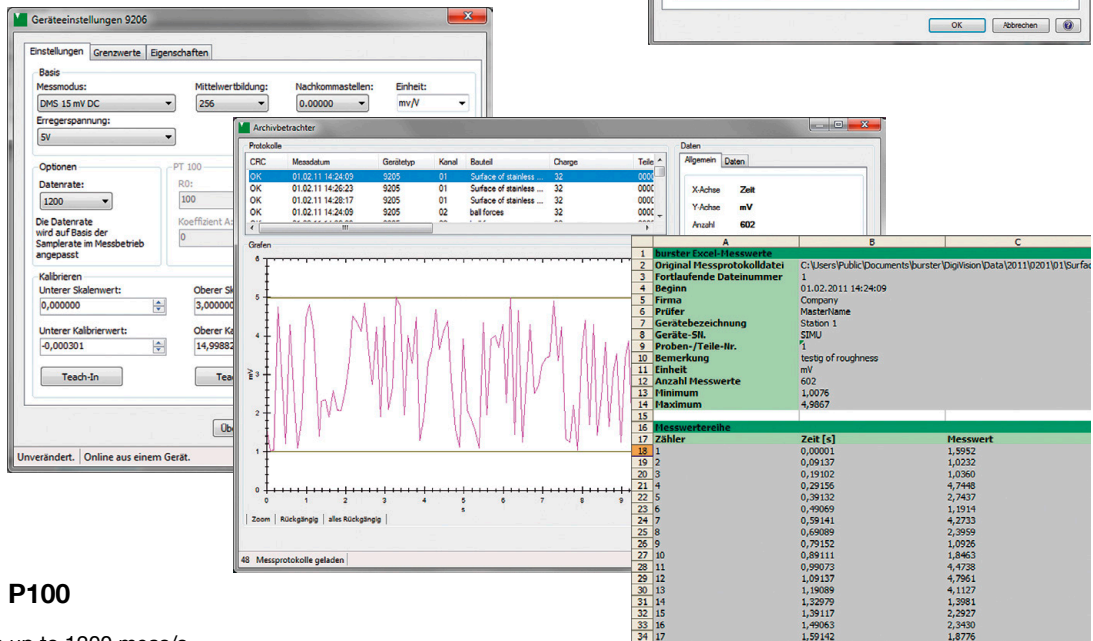

Software DigiVision P100

- ▶ max. 16 channels with up to 1200 meas/s


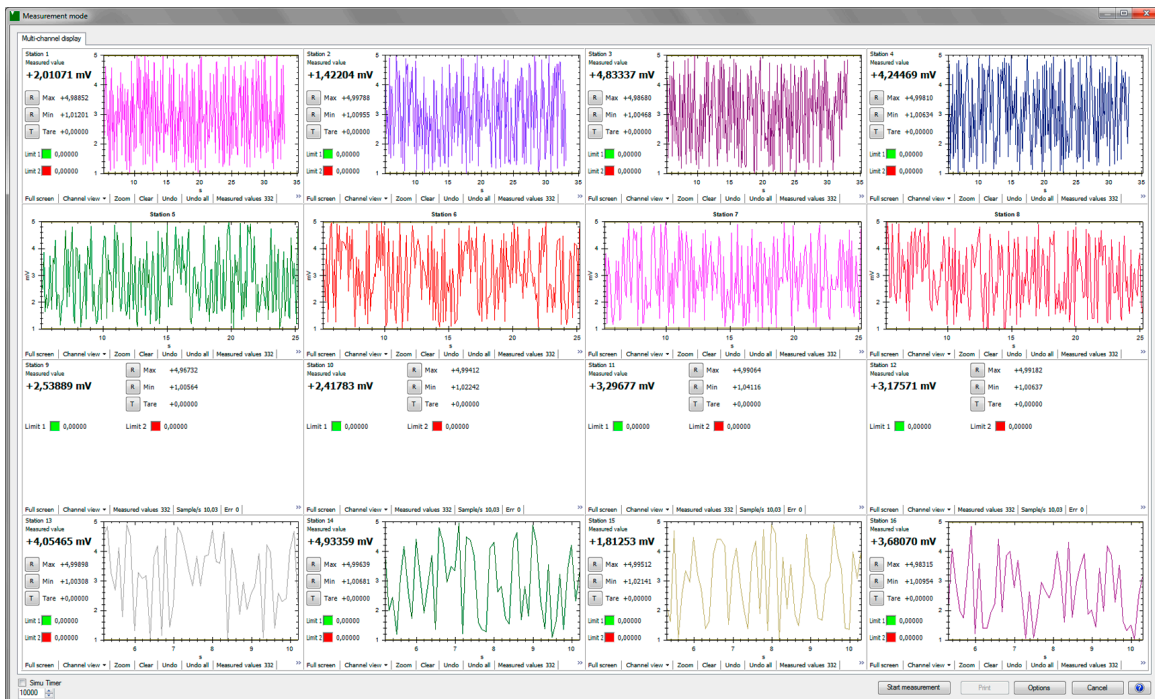


9206 EN



Software DigiVision 9206-P200

- ▶ Intuitive operation
- ▶ Easy-going configuration the interfaces
- ▶ Measurement rate up to 1200 meas./sec. for every channel
- ▶ Up to 32 measurements at the same time
- ▶ Storage of measurement protocols
- ▶ Data export in Excel
- ▶ Free mathematical measuring channels

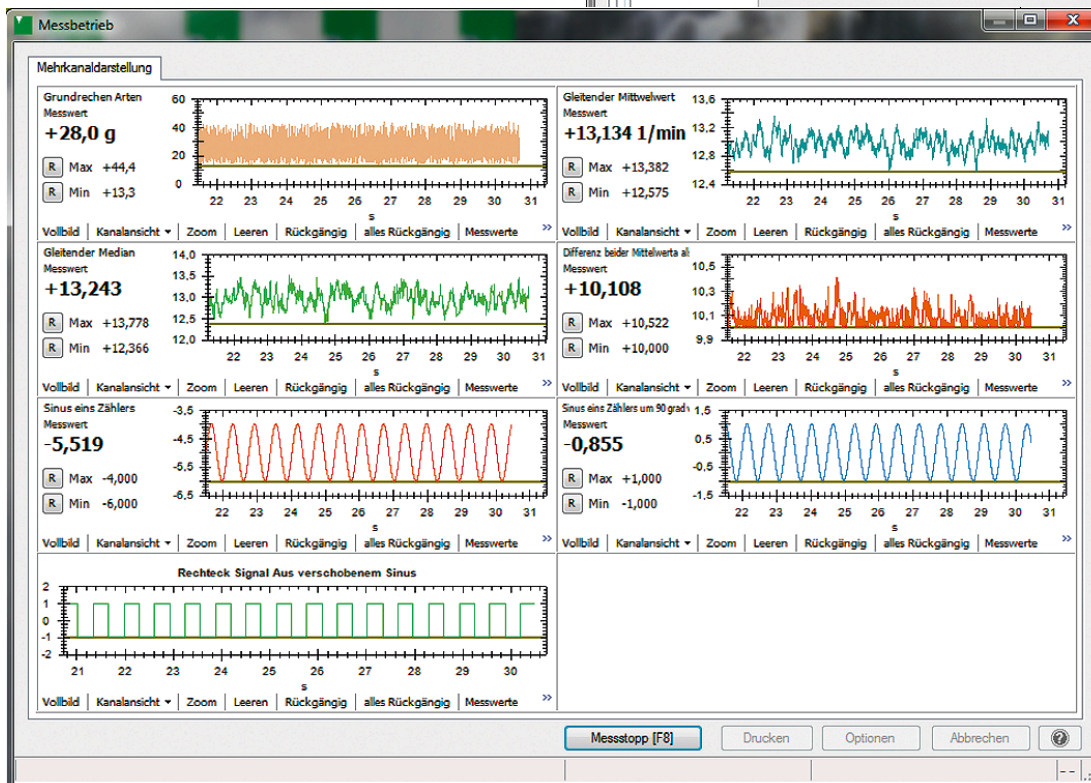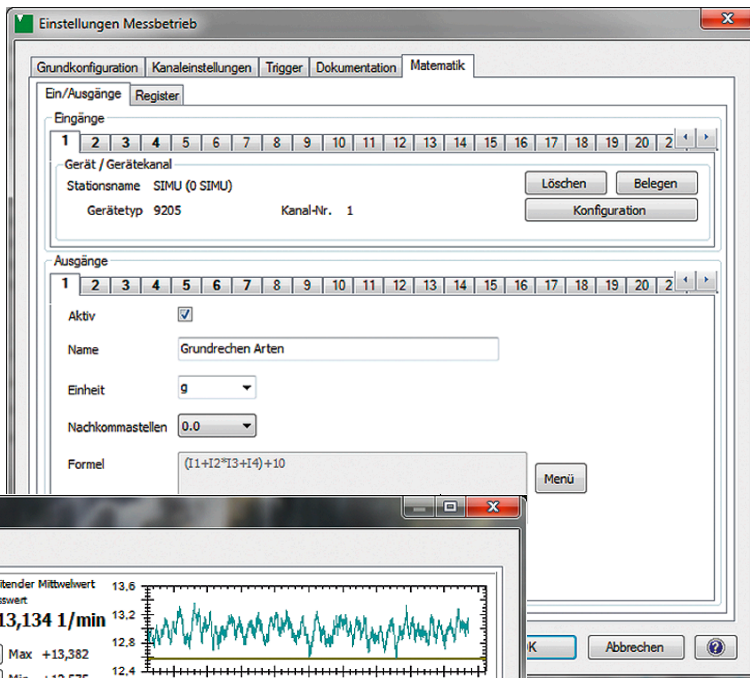

Filterfunktionen	IEEERemainder(x,y)	Gibt den Rest der Division zweier angegebener Zahlen zurück (x/y).
Eingänge	Max(x1x2)	Gibt die größere von zwei Gleitkommazahlen x1 und x2 mit doppelter Genauigkeit zurück.
Ausgänge	Min(x1x2)	Gibt die kleinere von zwei Gleitkommazahlen x1 und x2 mit doppelter Genauigkeit zurück.
Register	Pow(x,y)	Potenziiert eine angegebene Zahl x mit dem angegebenen Exponenten y.
Zähler	Round(x,y)	Rundet einen Gleitkommawert x mit doppelter Genauigkeit auf eine angegebene Anzahl von Bruchziffern y.

Beispiel

Beschreibung

Beispiel

Formel

$(I1+I2*I3+I4)+10$

Validierung

Ok

Typical Applications

- ▶ Differential measurements
- ▶ Averaging of the measurement results
- ▶ Determination of efficiency in engine test
- ▶ Determine mass moment of inertia
- ▶ Determine the frictional force
- ▶ Comparison of different measurement readings

