

# MV-SC3016M

1.6 MP 1/2.9" Vision Sensor



## Introduction

With built-in positioning and measurement algorithms, MV-SC3016M vision sensor can detect object's existence, position, dimension, etc. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via IO. The vision sensor supports multiple result output methods and customized result text output.

## Key Features

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to detect object's existence, position, dimension, etc.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including Serial Port, TCP Client, TCP Server, Profinet, Modbus, etc.


## Available Model

- 6 mm focal length:  
MV-SC3016M-06M-WBN
- 12.4 mm focal length:  
MV-SC3016M-12M-WBN
- 14.8 mm focal length:  
MV-SC3016M-15M-WBN

## Applicable Industry

Consumer electronics, food and medical industry, automobile, etc.

## Dimension

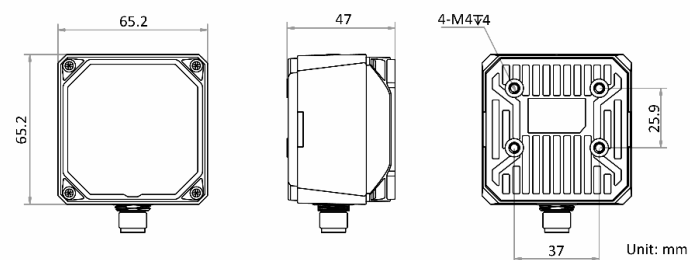


## Specification

Model	MV-SC3016M-06M-WBN	MV-SC3016M-12M-WBN	MV-SC3016M-15M-WBN
Tool			
Vision tool	<ul style="list-style-type: none"><li>● Existence: Pattern existence, spot existence, edge existence, circle existence, line existence</li><li>● Count: Pattern count, spot count, edge count</li><li>● Measurement: Brightness analysis, contrast measurement, greyscale size, diameter measurement, width measurement, line angle, line to line angle, point to line measurement</li><li>● Recognition: OCR, barcode recognition</li></ul>		
Solution capacity*	Supports solution importing and exporting, up to 32 solutions and 40 modules can be stored.		
Communication protocol	Serial Port, TCP Client, TCP Server, UDP Server, FTP, Profinet, Modbus, Ethernet/IP		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	1/2.9"		
Resolution	1408 × 1024		
Max. frame rate	60 fps		
Dynamic range	71.4 dB		
SNR	41 dB		
Gain	0 dB to 15 dB		
Exposure time	16 μs to 1 sec		
Pixel format	Mono 8		
Mono/color	Mono		
Electrical features			
Data interface	17-pin M12 connector provides power, Ethernet, digital I/O, and serial port		
Ethernet	Fast Ethernet		
Digital I/O	Input signal × 2 (Line 0/1), output signal × 3 (Line 5/6/7), bi-directional I/O × 3 (Line 2/3/4), and external button input × 1. Output signal can be set as NPN or PNP		
Power supply	24 VDC		
Max. power consumption	Approx. 48 W@24 VDC		
Mechanical			
Lens mount	M12-mount, mechanical autofocus lens		
Focal length	6 mm (0.2")	12.4 mm (0.5")	14.8 mm (0.6")
Lens cap	Transparent lens cap. Polarization or infrared filter lens cap is optional.		
Light source	White light by default. Red/blue/near-infrared is optional.		
Indicator	Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG)		
Dimension	65.2 mm × 65.2 mm × 47 mm (2.6" × 2.6" × 1.9")		
Weight	Approx. 280 g (0.6 lb.)		
Ingress protection	IP67 (under proper installation of lens and wiring)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Humidity	20% to 95% RH, non-condensing		
General			
Client software	SCMVS		
Certification	CE, FCC, KC		

\*Single solution supports up to 4 pattern count modules, or 4 existence modules.

## Detection Range

Lens focal length	Installation distance	Field of view	Single pixel accuracy
6 mm (0.2")	20 mm (0.8")	16.45 mm × 12.42 mm (0.6" × 0.5")	0.0115 mm
	300 mm (11.8")	248.4 mm × 186.3 mm (9.8" × 7.3")	0.1725 mm
12.4 mm (0.5")	80 mm (3.1")	33.12 mm × 12.84 mm (1.3" × 0.5")	0.023 mm
	600 mm (23.6")	248 mm × 186.3 mm (9.8" × 7.3")	0.1722 mm
14.8 mm (0.6")	100 mm (3.9")	33.12 mm × 24.84 mm (1.3" × 1.0")	0.023 mm
	800 mm (31.5")	264.96 mm × 198.72 mm (10.4" × 7.8")	0.184 mm

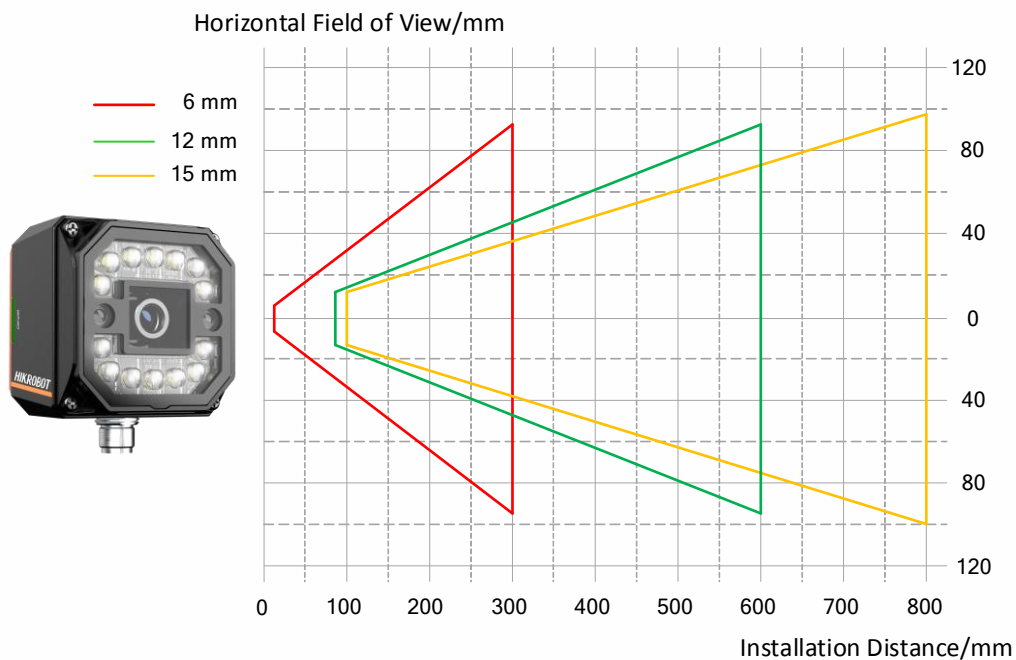

**A-TECH**  
AUTOMATION

Presented by: A-TECH AUTOMATION sales@a-tech.ca www.a-tech.ca  
Direct: 416 754 7008 Toll Free: 1 888 754 7008